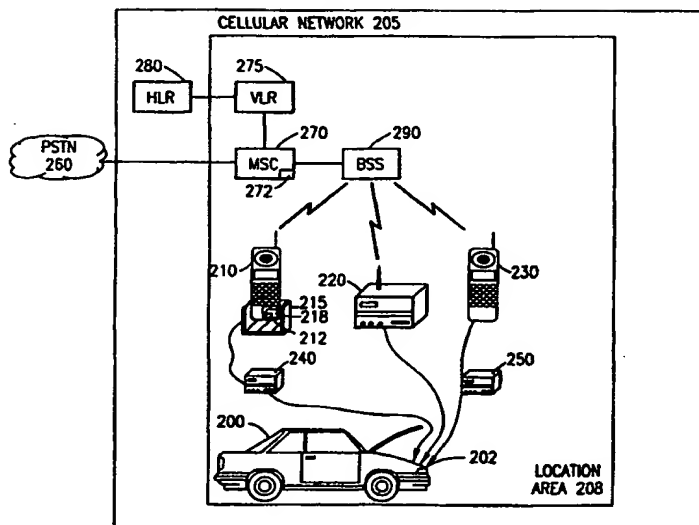


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/32, H04M 11/00, B60R 25/04, 25/10	A1	(11) International Publication Number: WO 99/31913 (43) International Publication Date: 24 June 1999 (24.06.99)
(21) International Application Number: PCT/US98/26570 (22) International Filing Date: 15 December 1998 (15.12.98) (30) Priority Data: 08/993,386 18 December 1997 (18.12.97) US (71) Applicant: ERICSSON INC. {US/US}; 7001 Development Drive, P.O. Box 13969, Research Triangle Park, NC 27709 (US). (72) Inventors: PARK, Chyrel; 6521 Lynch Lane, Garland, TX 75044 (US). EVANYK, Walt; 3200 Sherrye Drive, Plano, TX 75074 (US). (74) Agents: MOORE, Stanley, R. et al.; Jenkins & Gilchrist, P.C., Suite 3200, 1445 Ross Avenue, Dallas, TX 75202 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: SYSTEM AND METHOD FOR CELLULAR CONTROL OF AUTOMOBILE ELECTRICAL SYSTEMS

**(57) Abstract**

A telecommunications system and method is disclosed for instructing a device interfaced with a vehicle's electrical system to activate or deactivate specific electrical devices using the cellular network. This can be accomplished utilizing a mobile terminal (210) or a unit containing the equivalency of a mobile terminal receiver (220), hereinafter referred to as a "Radio Interface Unit" (RIU), which is interconnected to a "Power Interface Unit" (PIU) (240). The PIU directly interconnects to the vehicle's electrical system (202) and ignition. The subscriber can then access their vehicle's electrical system (202) from anywhere world-wide which reaches the mobile terminal by dialing their cellular phone number or a number associated with the RIU from another wireless or wireline phone. The RIU would then "answer" the call and receive instructions from the subscriber to activate or deactivate electrical devices on the vehicle.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

SYSTEM AND METHOD FOR CELLULAR CONTROL OF AUTOMOBILE ELECTRICAL SYSTEMS

BACKGROUND OF THE PRESENT INVENTION

5 Field of the Invention

The present invention relates generally to telecommunications systems and methods for connecting to an automobile's electrical system via a cellular system, and specifically to sending messages, via the cellular system, to a unit interfaced with an automobile's electrical system instructing the unit to access and activate or deactivate
10 specific electrical devices.

Background and Objects of the Present Invention

Cellular telecommunications is one of the fastest growing and most demanding telecommunications applications ever. Today it represents a large and continuously increasing percentage of all new telephone subscriptions around the world. A
15 standardization group, European Telecommunications Standards Institute (ETSI), was established in 1982 to formulate the specifications for the Global System for Mobile Communication (GSM) digital mobile cellular radio system.

With reference now to FIGURE 1 of the drawings, there is illustrated a GSM Public Land Mobile Network (PLMN), such as cellular network 10, which in turn is
20 composed of a plurality of areas 12, each with a Mobile Services Center (MSC) 14 and an integrated Visitor Location Register (VLR) 16 therein. The MSC/VLR areas 12, in turn, include a plurality of Location Areas (LA) 18, which are defined as that part of a given MSC/VLR area 12 in which a mobile station (MS) (terminal) 20 may move freely without having to send update location information to the MSC/VLR area 12
25 that controls the LA 18. Each Location Area 12 is divided into a number of cells 22. Mobile Station (MS) 20 is the physical equipment, e.g., a car phone or other portable phone, used by mobile subscribers to communicate with the cellular network 10, each other, and users outside the subscribed network, both wireline and wireless. The MS
30 20 may also include a Subscriber Identity Module (SIM) card 13, or other memory, which provides storage of subscriber related information, such as a subscriber

-2-

authentication key, e.g., the International Mobile Subscriber Identity (IMSI) number, temporary network data, and service related data (e.g. language preference).

The MSC 14 is in communication with at least one Base Station Controller (BSC) 23, which, in turn, is in contact with at least one Base Transceiver Station (BTS) 24. The BTS is the physical equipment, illustrated for simplicity as a radio tower, that provides radio coverage to the geographical part of the cell 22 for which it is responsible. It should be understood that the BSC 23 may be connected to several base transceiver stations 24, and may be implemented as a stand-alone node or integrated with the MSC 14. In either event, the BSC 23 and BTS 24 components, as a whole, are generally referred to as a Base Station System (BSS) 25.

With further reference to FIGURE 1, the PLMN Service Area or cellular network 10 includes a Home Location Register (HLR) 26, which is a database maintaining all subscriber information, e.g., user profiles, current location information, International Mobile Subscriber Identity (IMSI) numbers, and other administrative information. The HLR 26 may be co-located with a given MSC 14, integrated with the MSC 14, or alternatively can service multiple MSCs 14, the latter of which is illustrated in FIGURE 1.

The VLR 16 is a database containing information about all of the Mobile Stations 20 currently located within the MSC/VLR area 12. If a MS 20 roams into a new MSC/VLR area 12, the VLR 16 connected to that MSC 14 will request data about that Mobile Station (terminal) 20 from the HLR database 26 (simultaneously informing the HLR 26 about the current location of the MS 20). Accordingly, if the user of the MS 20 then wants to make a call, the local VLR 16 will have the requisite identification information without having to reinterrogate the HLR 26. In the aforementioned manner, the VLR and HLR databases 16 and 26, respectively, contain various subscriber information associated with a given MS 20.

In many situations, a subscriber may desire to access and activate or deactivate electrical devices within his or her automobile, or other similar vehicle, such as a motor home, truck, tractor trailer, motorcycle, boat, or plane. For example, if the subscriber has accidentally locked their keys inside the car, parked the car and then not remember if the headlights were turned off or if the car doors were locked, or parked

the car in a large parking lot and not remembered where it was parked, the subscriber may wish to have access to various electrical systems, such as door locks, headlights, and the engine. In addition, if the subscriber's car has been stolen, the subscriber may want to know the location of the car or alternatively, may wish to disable the car to prevent the thief from driving it. One convenient way of accessing such electrical systems would be to dial their MS within their car and instruct their MS to activate or deactivate specific electrical devices. Unfortunately, there is currently no existing way of interfacing an MS to an automobile's electrical system.

It is therefore an object of the invention to interface to and control an automobile's ignition and electrical systems via the cellular system.

SUMMARY OF THE INVENTION

The present invention is directed to telecommunications systems and methods for instructing a device interfaced with an automobile's (or any type of vehicle's) electrical system to activate or deactivate specific electrical devices, using the cellular network. This can be accomplished utilizing a mobile terminal or a unit containing the equivalency of a mobile terminal receiver, hereinafter referred to as a "Radio Interface Unit" (RIU), which is interconnected to a "Power Interface Unit" (PIU). The PIU directly interconnects to the automobile's electrical system and ignition. The subscriber can then access their automobile's electrical system from anywhere world-wide which reaches the mobile terminal by dialing their cellular phone number or a number assigned to the RIU from another wireless or wireline phone. The RIU would then "answer" the call and receive the instructions from the subscriber for activating or deactivating specific electrical devices on the automobile, including, but not limited to activating/deactivating the car alarm, turning off the head lights, locking/unlocking car doors, starting the engine, turning on the heater/AC, disabling the engine, or flashing the headlights and/or blowing the horn.

BRIEF DESCRIPTION OF THE DRAWINGS

The disclosed inventions will be described with reference to the accompanying drawings, which show important sample embodiments of the invention and which are incorporated in the specification hereof by reference, wherein:

FIGURE 1 is a block diagram of a conventional terrestrially-based wireless telecommunications system;

FIGURE 2 depicts a cellular interface to an automobile's electrical system for activating or deactivating specific electrical devices in accordance with preferred embodiments of the present invention; and

FIGURE 3 demonstrates positioning of an automobile using the cellular interface in accordance with preferred embodiments of the present invention.

DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EXEMPLARY EMBODIMENTS

The numerous innovative teachings of the present application will be described with particular reference to the presently preferred exemplary embodiment. However, it should be understood that this class of embodiments provides only a few examples of the many advantageous uses of the innovative teachings herein. In general, statements made in the specification of the present application do not necessarily delimit any of the various claimed inventions. Moreover, some statements may apply to some inventive features but not to others.

With reference now to FIGURE 2 of the drawings, communication to an automobile's electrical system, generally referred to herein by reference numeral 202, via a cellular system 205 can be accomplished using a Mobile Station (MS) 210 or a unit containing the equivalency of a cellular phone receiver, hereinafter referred to as a "Radio Interface Unit" (RIU) 220 and 230, interconnected to a "Power Interface Unit" (PIU) (240, 220 and 250), which interconnects to the automobile's electrical system 202, ignition, etc. When a subscriber dials a phone number associated with the MS 210 or RIU 220 or 230, the MS 210 or RIU 220 or 230 can "answer" the call and receive instructions from the subscriber to access and activate or deactivate various electrical devices within the automobile 200. The subscriber can instruct the MS 210

or RIU 220 or 230 to cause the PIU (240, 220 or 250) to perform a variety of different functions, including, but not limited to: activating/deactivating the car alarm, turning on/off the head lights, locking/unlocking the car doors, starting the engine and turning on the heater/air conditioning, disabling the engine, which can be especially useful if the car has been stolen, or flashing the headlights and/or blowing the horn, which can be useful if the car is parked in a large parking lot. Advantageously, the subscriber can connect to the automobile's electrical system 202 from any location world-wide that provides cellular service to the MS 210 or RIU 220 or 230 within the automobile 200, thereby providing a mechanism to relieve a distant car owner of concerns over their car's status.

In a first embodiment, the subscriber can connect to the automobile's electrical system 202 using an MS 210 located in the automobile 200, as shown in FIGURE 2. The MS 210 preferably has normal two-way communication capability and only functions as an interface to the automobile's electrical system 202 when residing in a device similar to a hands-free mount, hereinafter referred to as a "Cell Interface Device" (CID) 215. The CID 215 interconnects to the PIU 240, which activates or deactivates specific electrical devices within the automobile 200.

In a typical scenario, the subscriber can access the automobile's electrical system 202 by dialing the phone number associated with the MS 210. The subscriber can place the call from either another MS (not shown), or a wireline phone within the Public Switched Telephone Network (PSTN) 260, as is understood in the art. After a predetermined number of rings, if the MS 210 is placed within the CID 215, the MS 210 "answers" the call and requests security information from the calling party to prevent unauthorized access to the automobile's electrical system 202. However, if the MS 210 is not within the CID 215, the MS 210 will send a message to the calling party indicating that access to the automobile's electrical system 202 cannot be performed at this time.

When a call to the MS 210 enters the cellular network 205, a Mobile Switching Center (MSC) 270 serving a location area 208 that the MS 210 is in accesses subscriber information associated with that MS 210 from the Visitor Location Register 275, which obtained the information from a Home Location Register 280 when the MS

-6-

210 entered the serving area 208. Thereafter, the MSC 270 determines whether the subscriber has purchased the automobile electrical system access feature. If so, the MSC 270 forwards the call to an automobile electrical system access (AESA) system 272 within the MSC 270, which prompts the subscriber for the security information or password. The security information can be, for example, a digit string followed by the pound sign, e.g., xxxx#, or other such termination indicia.

This process is similar to a voice mail answering service offered by many service providers. With current voice mail systems, if a subscriber chooses to not answer a call, for instance, a subscriber may not want to be distracted while driving, the call can be forwarded to a voice mail system within the MSC where the calling party can leave a message. These messages can be retrieved at a later time by the subscriber entering a password and a service code associated with listening to saved messages.

Likewise, with the AESA system 272, once the subscriber enters the correct password, the AESA system 272 again prompts the subscriber for the desired service code. The particular access features can be determined by the service provider or by the subscriber when the service is activated. The AESA system 272 prompts can either be general, in which the system 272 merely asks for any service code, or the prompts can be more user friendly, in which the system 272 offers several options and instructs the subscriber to choose one of the options. The password and service code information can then be sent to the MSC 270 from the subscriber, via a Base Station System 290 serving the location area 208 the MS 210 is in, using either a Short Message Service (SMS) message or an Unstructured Supplementary Service Data (USSD) message.

Once the subscriber's service code is received by the AESA system 272, the service code or instruction is sent to the MS 210 from the MSC 270 via the BSS 290, using an SMS or USSD message, and received into a memory 218, e.g., a Subscriber Identity Module (SIM) card, within the MS 210. The MS 210 then instructs the CID 215, which is connected to the MS 210 and the PIU 240, to instruct the PIU 240 to perform the feature associated with the received service code. Optionally, a message can be sent back to the calling subscriber acknowledging performance of the requested

-7-

feature. It should be understood that the service provider can charge the subscriber a flat monthly fee for the service, or can charge per minute of use or per use. In addition, roaming charges would apply if the MS/CID 210/215 within the automobile 200 has roamed outside of the home cellular network 205.

5 Alternatively, the password and service code information 212 can be stored in the SIM card 218 within the MS 210. The MS 210 can be programmed to answer the call after a predetermined number of rings and send the prompts to the calling subscriber through the cellular network 205. The MS 210 can then receive the requested service code and instruct the CID 215 and PIU 240 accordingly, using the
10 stored information 212. Advantageously, the CID 215 could also serve as a charging facility for the MS 210 battery, which would be able to charge the battery while simultaneously instructing the PIU 240 to access the automobile's electrical system 202.

 In an alternative embodiment, the CID 215 can be combined with the MS 210,
15 the combination being hereinafter referred to as a Radio Interface Unit (RIU) 230, which is connected directly to the PIU 250. In this embodiment, the RIU 230 can make and receive calls, but it cannot be removed from the automobile 200. Instructions to the automobile's electrical system 202 can be sent to the RIU 230 in the same manner described hereinbefore, which can then instruct the PIU 250 to perform
20 the requested feature.

 In still a further alternative embodiment, the RIU 230 and PIU 250 can be combined into one unit 220 which interfaces directly with the automobile's electrical system 202. However, with this embodiment, the RIU/PIU combination 220 cannot be used to place outgoing calls. Instead, only signaling information can be sent to and
25 from the RIU/PIU combination 220. In addition, the RIU/PIU combination 220 can only be implemented with the password and security code information being stored within the cellular network 205, e.g., within the AESA system 272, instead of within the RIU/PIU combination 220 itself. Advantageously, the RIU/PIU combination 220 can be installed underneath the hood of the automobile 200, making it undetectable to
30 persons within the passenger section of the automobile 200. This can be especially

-8-

useful if the automobile 200 has been stolen and the subscriber wishes to instruct the engine to turn off (or other theft-detering feature) without alerting the thief.

Another feature which can be added to the subscriber's automobile electrical system access feature is a positioning feature, which would enable the subscriber or police to locate the automobile in the event the automobile has been stolen. With reference now to FIGURE 3 of the drawings, when the RIU or MS 310 enters a new location area 308, the RIU 310 "registers" with the MSC 320 serving the area 308 that it is in. If the automobile 300 has been stolen, the subscriber can place a call to the RIU 310, which will be routed to the serving MSC 320, and enter a service code for positioning.

If the password and security code information is stored within the cellular network 305, e.g., the call is forwarded to the AESA system 322, the AESA system 322 can request positioning of the RIU 310 by a positioning center 340, using, for example, positioning data from three Base Transceiver Stations (BTSs) (not all being shown), one of which is the serving BTS 330, via the serving Base Station Controller (BSC) 335, to triangulate the position of the RIU 310. Thereafter, either the positioning center 340 or the AESA system 322 can route the location information to a local law enforcement center 360 through, for example, a WEB-based interface 350. In addition, if the AESA system 322 contains subscriber information pertaining to the make and model of the automobile, such information can also be transmitted to the law enforcement center 360, via the WEB-based interface 350, to assist the police in locating the stolen automobile 300. The location information can be transmitted to the police 360 at regular intervals until the automobile 300 has been found, at which time the police 360 can notify the AESA system 322 through the WEB-based interface 350, which can then notify the calling subscriber, e.g., by ringing back the original calling number or by accessing the subscriber's voice mail system (not shown) and leaving a message indicating that the automobile 300 has been found.

Alternatively, if the password and security code information 312 is stored within the SIM card 318 of the MS 310 itself, the MS 310 itself can request positioning of itself by the positioning center 340. The location information can then

-9-

be sent either by the positioning center 340 or by the MS 310 via the serving MSC 320 to the local law enforcement agency 360.

Furthermore, if the subscriber is "car jacked" and held hostage inside the automobile 300, the subscriber could press a button (not shown) connected to the MS
5 or RIU 310, which would instruct the MS 310 to begin the positioning process and to notify the police 360, either by directly requesting the positioning or by accessing the AESA system 322. Alternatively, the subscriber may periodically notify the system 322, e.g., by pressing the aforementioned button, and by failing to so notify within a predetermined time period, may activate the positioning process and notification of the
10 police. This can be especially useful if the subscriber feels "uneasy" driving through a certain area. The notification process could be activated or deactivated by pressing function keys (not shown) on the MS 310.

As will be recognized by those skilled in the art, the innovative concepts described in the present application can be modified and varied over a wide range of
15 applications. Accordingly, the scope of patented subject matter should not be limited to any of the specific exemplary teachings discussed.

For example, it should be understood that the aforementioned cellular interface can be applied to any type of vehicle, including, but not limited to, cars, trucks, motor homes, tractor trailers, boats, planes, motorcycles, or any other vehicle having an
20 electrical system which can be interfaced with the cellular network.

-10-

WHAT IS CLAIMED IS:

1. A telecommunications system for interfacing with an electrical system within a vehicle using a cellular network, said telecommunications system comprising:
a mobile switching center for connecting a call to an access system, said access
5 system receiving a service code;

a radio interface unit within said vehicle in wireless communication with said mobile switching center, said radio interface unit receiving an instruction associated with said service code from said access system; and

a power interface unit connected to said radio interface unit and said electrical
10 system, said power interface unit receiving said instruction associated with said service code from said radio interface unit and interfacing to said electrical system to perform said instruction on said electrical system.

2. The telecommunications system of Claim 1, wherein said radio
15 interface unit and said power interface unit are co-located.

3. The telecommunications system of Claim 1, wherein said radio interface unit comprises a mobile terminal and a cell interface device, said cell interface device being connected to said power interface unit, said mobile terminal
20 being removable from said cell interface device.

4. The telecommunications system of Claim 3, wherein said access system is located within a memory within said mobile terminal.

5. The telecommunications system of Claim 4, wherein said memory is
25 a Subscriber Identity Module card.

6. The telecommunications system of Claim 1, wherein said access system is located within said mobile switching center.

30

-11-

7. The telecommunications system of Claim 1, wherein said call is from a subscriber associated with said radio interface unit, said access system further receiving a password from said subscriber, said password allowing said subscriber to access said access system.

5

8. The telecommunications system of Claim 1, wherein said instruction associated with said service code is selected from the group consisting of: "activate car alarm", "deactivate car alarm", "turn off head lights", "unlock doors", "lock doors", "start engine", "turn on heater", "turn on air conditioner", "turn off engine", "flash headlights", and "blow horn".

10

9. The telecommunications system of Claim 1, wherein said instruction associated with said service code is associated with an electrical device within said electrical system, said power interface unit interfacing with said electrical device to perform said instruction.

15

10. The telecommunications system of Claim 1, further comprising a base station system connected to said mobile switching center and in wireless communication with said radio interface unit.

20

11. The telecommunications system of Claim 1, wherein said instructions associated with said service code are sent to said radio interface unit using a Short Message Service message.

25

12. The telecommunications system of Claim 1, wherein said instructions associated with said service code are sent to said radio interface unit using an Unstructured Supplementary Service Data message.

30

13. The telecommunications system of Claim 1, wherein said instruction associated with said service code is a positioning request, said instructions associated

-12-

with said service code not being sent to said radio interface unit when said instruction associated with said service code is said positioning request.

14. The telecommunications system of Claim 13, wherein said access
5 system determines the location of said radio interface unit within said vehicle when said service code is said positioning request.

15. The telecommunications system of Claim 14, wherein said access
system determines the location of said radio interface unit by sending said positioning
10 request to a positioning center, said positioning center determining the location of said radio interface unit and sending the location to said access system.

16. The telecommunications system of Claim 14, wherein said access
system connects to a law enforcement center via a WEB-based interface, the location
15 of said radio interface unit being sent to said law enforcement center.

17. A method for interfacing with an electrical system within a vehicle
using a cellular telecommunications system, said method comprising the steps of:

receiving, by a mobile switching center within said cellular
20 telecommunications system, a call to a radio interface unit within said vehicle;

connecting said call, by said mobile switching center, to an access system
within said cellular telecommunications system;

receiving, by said access system, a service code;

sending, by said access system, an instruction associated with said service code
25 to said radio interface unit;

sending, by said radio interface unit, said instruction to a power interface unit
connected to said radio interface unit and said electrical system; and

performing, by said power interface unit, said instruction on said electrical
system.

-13-

18. The method of Claim 17, wherein said radio interface unit and said power interface unit are co-located.

5 19. The method of Claim 17, wherein said radio interface unit comprises a mobile terminal and a cell interface device, said cell interface device being connected to said power interface unit, said mobile terminal being removable from said cell interface device.

10 20. The method of Claim 19, wherein said access system is located within a memory within said mobile terminal.

21. The method of Claim 20, wherein said memory is a Subscriber Identity Module card.

15 22. The method of Claim 17, wherein said access system is located within said mobile switching center.

20 23. The method of Claim 17, wherein said call is from a subscriber associated with said radio interface unit, and further comprising, before said step of receiving said service code, the step of:

receiving, by said access system a password from said subscriber, said password allowing said subscriber to access said access system.

25 24. The method of Claim 17, wherein said instruction associated with said service code is selected from the group consisting of: "activate car alarm", "deactivate car alarm", "turn off head lights", "unlock doors", "lock doors", "start engine", "turn on heater", "turn on air conditioner", "turn off engine", "flash headlights", and "blow horn".

30 25. The method of Claim 17, wherein said instruction associated with said service code is associated with an electrical device within said electrical system, said

-14-

step performing said instruction being performed by said power interface unit interfacing with said electrical device.

26. The method of Claim 17, wherein said step of sending said instruction associated with said service code to said radio interface unit is performed by using a Short Message Service message.

27. The method of Claim 17, wherein said step of sending said instruction associated with said service code to said radio interface unit is performed by using an Unstructured Supplementary Service Data message.

28. The method of Claim 17, wherein said instruction associated with said service code is a positioning request, said step of sending said instruction associated with said service code to said radio interface unit not being performed when said instruction associated with said service code is said positioning request.

29. The method of Claim 28, further comprising, after said step of receiving said service code, the step of:

determining, by said access system, the location of said radio interface unit within said vehicle when said service code is said positioning request.

30. The method of Claim 29, wherein said step of determining the location of said radio interface unit is performed by said access system sending said positioning request to a positioning center, said positioning center determining the location of said radio interface unit and sending the location to said access system.

31. The method of Claim 29, further comprising, after said step of determining the location of said radio interface unit, the steps of:

connecting, by said access system, to a law enforcement center via a WEB-based interface; and

-15-

sending, by said access system, the location of said radio interface unit to said law enforcement center.

5 32. A radio interface unit for interfacing with an electrical system within a vehicle, said radio interface unit comprising:

 receiving means for receiving an instruction to be performed on said electrical system from a cellular telecommunications system in wireless communication with said radio interface unit;

 a memory for storing said instruction; and

10 interfacing means for interfacing to said electrical system to perform said instruction on said electrical system.

 33. The radio interface unit of Claim 32, wherein said interfacing means comprises a power interface unit co-located with said radio interface unit.

15 34. The radio interface unit of Claim 33, wherein said interfacing means comprises power interface unit connected to said radio interface unit.

 35. The radio interface unit of Claim 32, further comprising a mobile terminal and a cell interface device, said memory being located within said mobile terminal, said mobile terminal being removable from said cell interface device.

 36. The radio interface unit of Claim 35, wherein said memory is a Subscriber Identity Module card.

25 37. The radio interface unit of Claim 35, wherein said instruction is a service code, said service code having an electrical feature associated therewith, said receiving means being located within said mobile terminal, said mobile terminal instructing said cell interface device to perform said electrical feature on said electrical system using said interfacing means.

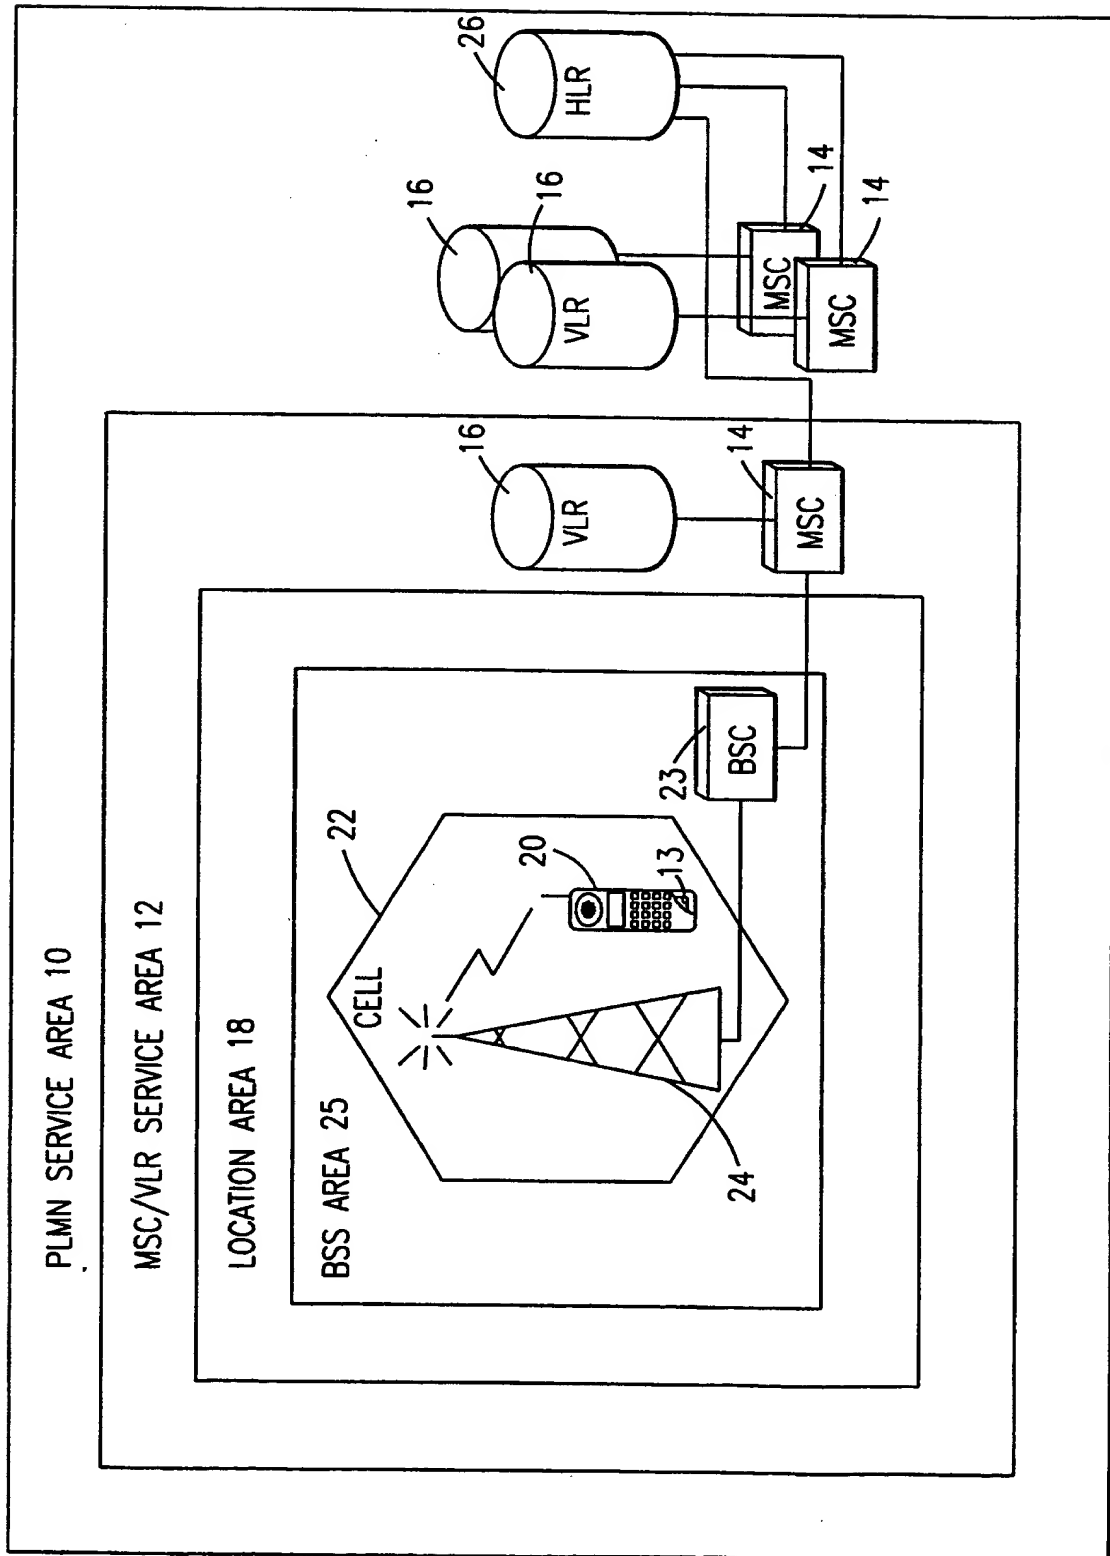


FIG. 1

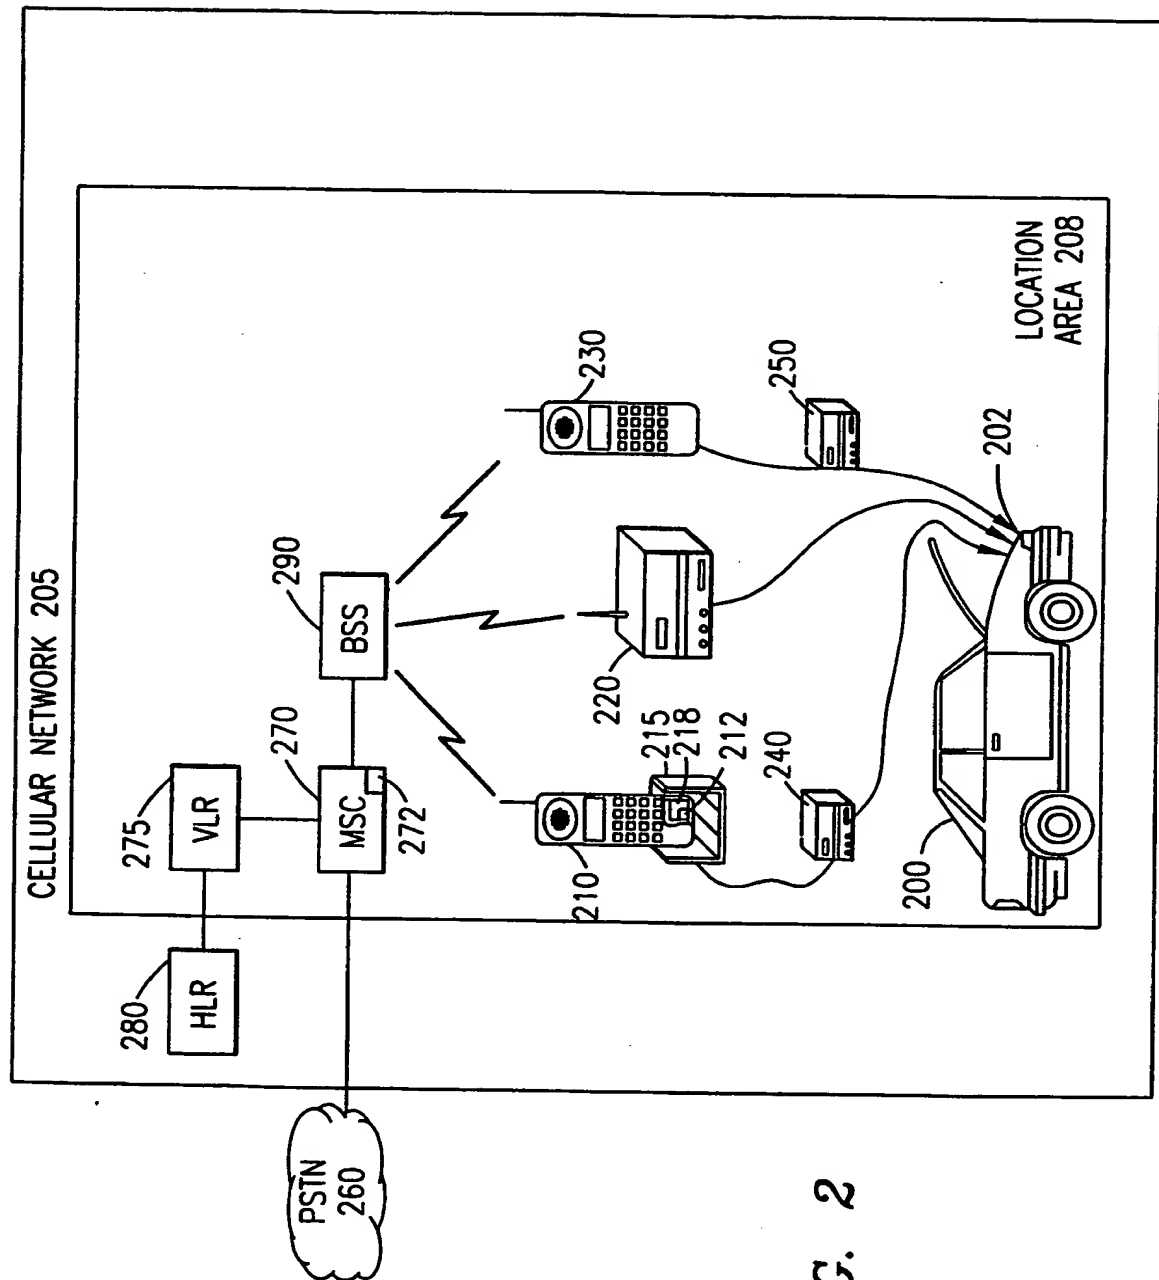


FIG. 2

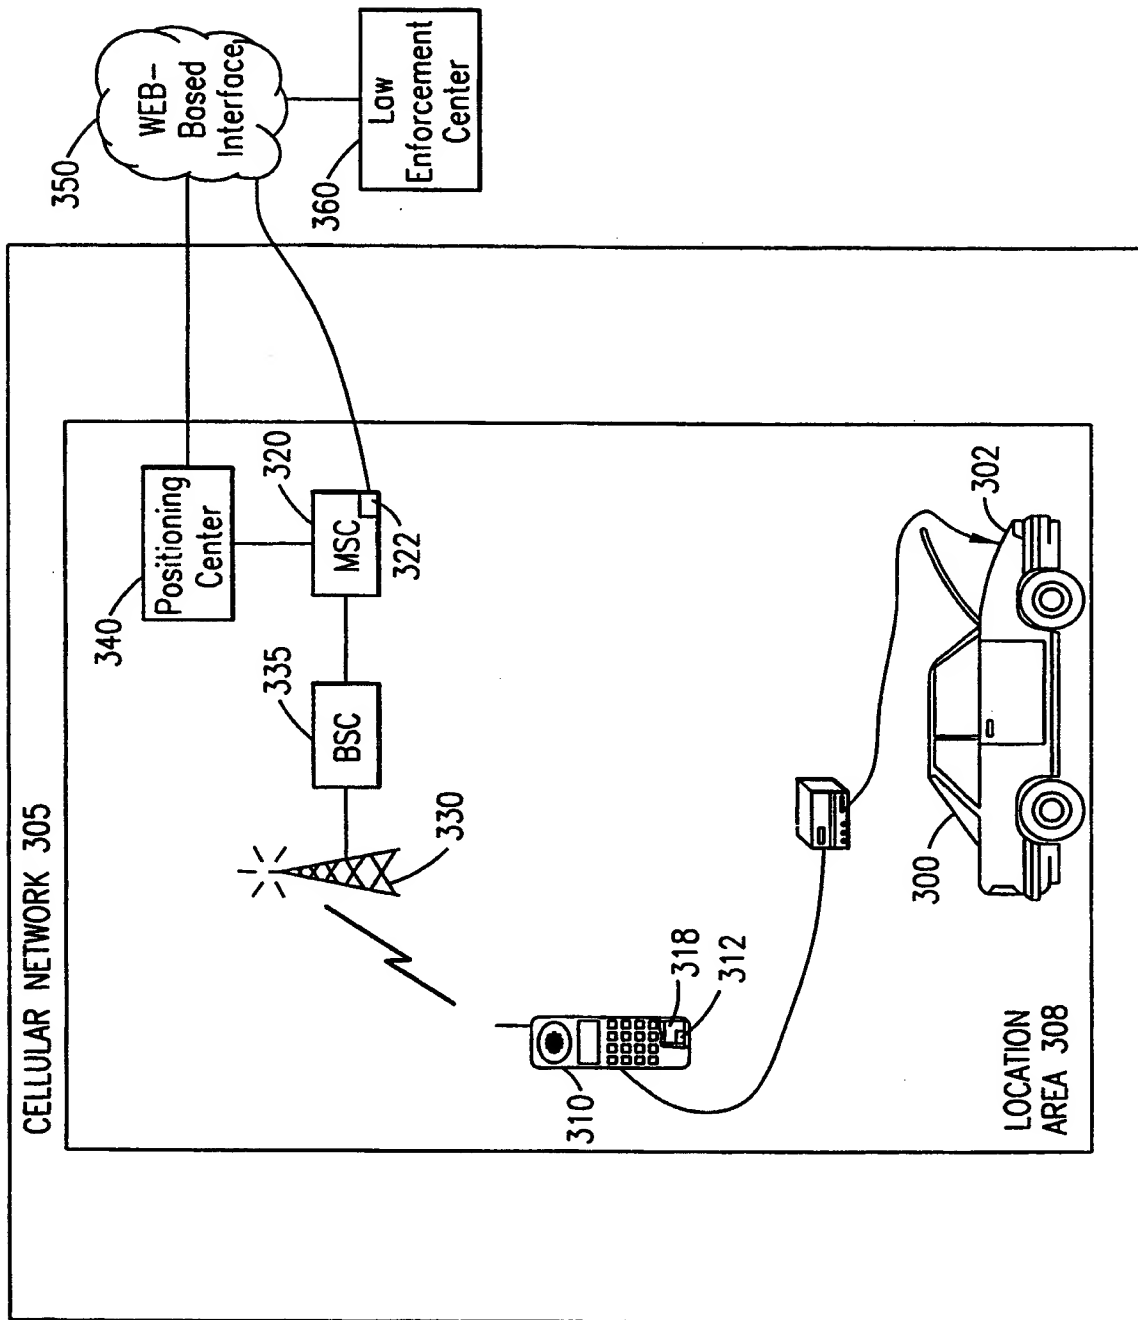


FIG. 3

INTERNATIONAL SEARCH REPORT

ational Application No

PCT/US 98/26570

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04Q7/32 H04M11/00 B60R25/04 B60R25/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q B60R H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 24005 A (DIMINO MICHAEL) 3 July 1997	1-4, 7-10, 13-15, 17-20, 23-25, 28-30, 32-35, 37
A	see page 7, line 16 - page 8, line 13 see page 9, line 23 - page 11, line 18 see page 12, line 11 - line 28 see page 14, line 27 - page 16, line 19 see page 17, line 26 - page 19, line 32 --- -/--	16, 31

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

15 April 1999

Date of mailing of the international search report

26/04/1999

Name and mailing address of the ISA.

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Heinrich, D

INTERNATIONAL SEARCH REPORT

In ational Application No

PCT/US 98/26570

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 739 777 A (EBERSPÄCHER J) 30 October 1996	1-4, 7, 9, 10, 17-20, 23, 25, 32-35, 37
A	see the whole document	8, 11, 12, 24, 26, 27
X	DE 40 03 091 A (WEBASTO AG FAHRZEUGTECHNIK) 8 August 1991	1-3, 8-10, 17-19, 24, 25, 32-35, 37
A	see column 3, line 60 - column 5, line 28	7, 23
X	DE 42 27 658 C (KNAPPE JOACHIM) 2 September 1993	1-3, 8-10, 17-19, 24, 25, 32-35, 37
A	see the whole document	7, 23
X	PATENT ABSTRACTS OF JAPAN vol. 096, no. 007, 31 July 1996 -& JP 08 079831 A (MATSUSHITA ELECTRIC IND CO LTD), 22 March 1996 see abstract	1-3, 8-10, 13, 17-19, 24, 25, 32-35, 37

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/26570

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9724005	A	03-07-1997	AU 1334197 A	17-07-1997
EP 0739777	A	30-10-1996	DE 19515355 A	31-10-1996
DE 4003091	A	08-08-1991	NONE	
DE 4227658	C	02-09-1993	NONE	

